

BS560D





Parameter

Temperature: $-20^{\circ}\text{C} \sim 100^{\circ}\text{C}$
 Pressure: $\leq 0.50\text{Mpa}$ Linear Velocity: $\leq 8\text{m/S}$
 Pumps: Submersible pumps, sewage pumps;
 applied to the muddy water, sewage water
 or weak corrosive fluid with solid grains

Materials

Rotary Ring: Carbon/SiC/TC
 Stationary Ring: Ceramic/SiC/TC
 Secondary Seals: NBR/EPDM/VITON
 Spring & Other Parts: SS304/SS316

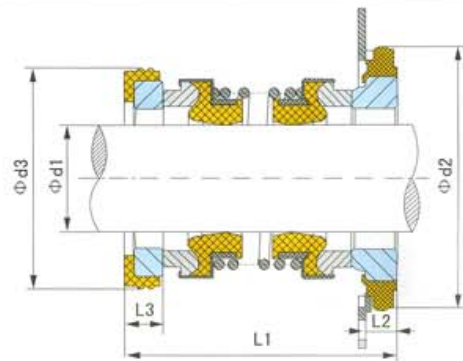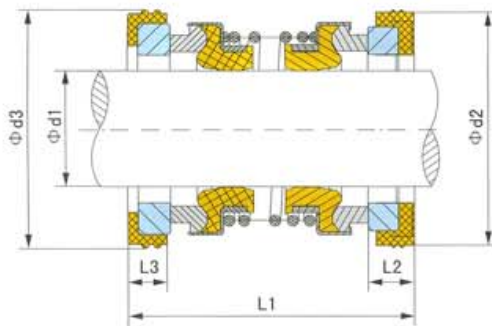

Model	d1	d3	d2	L1	L2	L3
BS560D-13	13	25	25	36	5	5
BS560D-14	14	30	30	37	5	5
BS560D-15	15	30	30	37	5	5
BS560D-16	16	30	30	37	5	5
BS560D-18	18	35	38	49	7	10
BS560D-19	19	35	38	49	7	10
BS560D-20	20	38	44	49	7	7
BS560D-25	25	44	50	51	7	7
BS560D-30	30	50	57	59	9	8
BS560D-35	35	58	64	61	9	9
BS560D-40	40	64	70	64	11	9
BS560D-45	45	66	70	65	10	9
BS560D-50	50	72	80	69	10	9