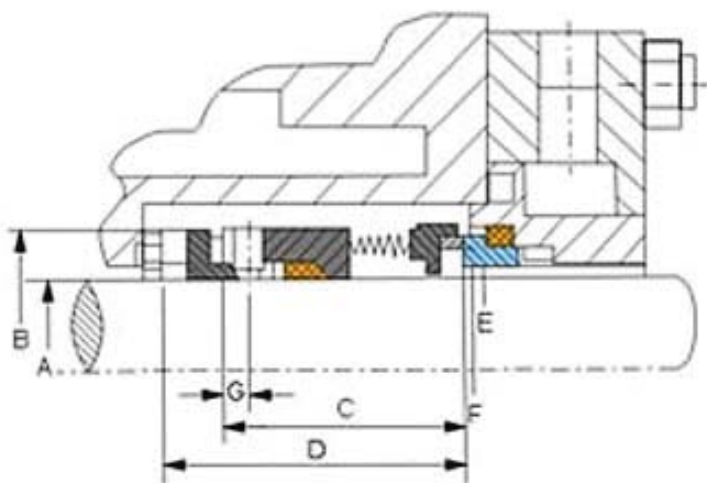


BS-606

Рабочие условия

Температура -75°C~425°C

 Давление $\leq 2.0\text{Mpa}/6.9\text{Mpa}$

 Скорость $\leq 25\text{m/sec}$

Материалы

 Stationary Ring: SIC/TC
 Rotary Ring: Carbon/SIC/TC
 Secondary Seal: Carbon
 Bellows: AM350/Inconel718
 Metal Parts: SUS304/SUS316

Seal size	A	B	C	D	E	F	G
0.750	19.05	41.28	42.85	58.72	36.53	31.45	4.78
0.875	22.23	44.45	43.66	59.51	39.75	34.67	4.78
1.000	25.40	47.63	43.66	59.51	43.66	38.58	4.78
1.125	28.58	50.80	44.45	60.33	46.86	41.78	4.78
1.250	31.75	53.98	44.45	60.33	50.04	43.69	4.78
1.375	34.93	57.15	46.84	62.69	53.21	46.86	6.35
1.500	38.10	60.33	47.63	63.50	56.39	50.04	6.35
1.625	41.28	63.50	47.63	63.50	59.56	53.21	6.35
1.750	44.45	66.68	48.41	64.29	52.76	56.41	6.35
1.875	47.63	69.85	48.41	64.29	65.91	59.56	6.35
2.000	50.80	73.03	49.20	65.07	69.11	62.76	6.35
2.125	53.98	76.20	49.20	65.07	72.29	65.94	6.35
2.250	57.15	82.55	50.80	69.85	78.64	71.02	6.35
2.375	60.33	85.73	51.59	70.64	81.81	74.19	6.35
2.500	63.50	88.90	51.59	70.64	85.01	77.39	6.35
2.625	66.68	93.65	53.98	73.03	88.95	81.33	6.35
2.750	69.85	96.82	57.15	76.20	92.13	84.51	7.14
2.875	73.03	101.60	57.15	76.20	95.81	87.43	7.14
3.000	76.20	104.78	57.15	76.20	98.98	90.60	7.14
3.125	79.38	107.95	57.15	76.20	102.16	93.78	7.14
3.250	82.55	111.13	57.15	76.20	105.33	96.95	7.14
3.375	85.73	114.30	57.15	76.20	108.51	100.13	7.14
3.500	88.90	117.48	57.15	76.20	111.68	103.30	7.14
3.625	92.08	120.65	57.15	76.20	114.86	106.48	7.14
3.750	95.25	123.83	57.15	76.20	118.03	109.65	7.14