

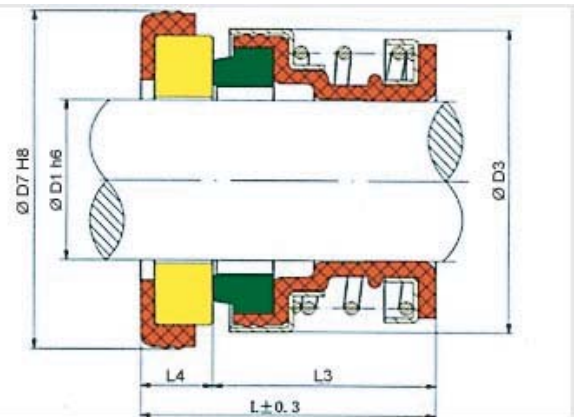
ZY-103

Рабочие условия

Температура	-20°C~100°C
Давление	≤0.5Mpa
Скорость	≤5m/sec

Материалы

☑ Spring	SUS304/SUS316
☑ Drive Ring	SUS304/SUS316
☑ Retainer	SUS304/SUS316
● Bellows	NBR/EPDM/VITON
● Rotary Ring	Carbon/SiC/TC
● Stationary Ring	Ceramic/SiC/TC
☑ Cup Gasket	NBR/EPDM/VITON


ZY-103

MODEL	D1	D3	D7	L1	L3	L4
ZY103-10	10	22.5	26	20.5	15.5	5
ZY103-12	12	22.5	26	20.5	15.5	5
ZY103-12T	12	22.5	26	22.5	15.5	7
ZY103-14	14	28	30	20.5	15.5	5
ZY103-16	16	30	35	20.5	15	5
ZY103-17	17	30	35	20.5	15.5	5
ZY103-18	18	30	35	20.5	15.5	5