




Mechanical seal

Used in mini clean water pumps and electric pumps.

ZY-103

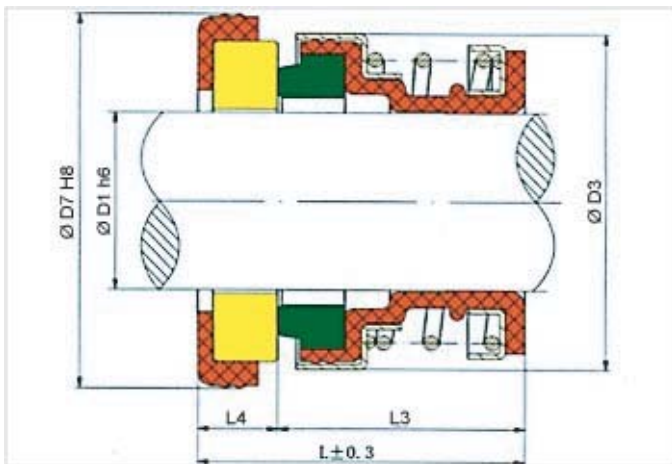

Mechanical seal structure ZY-103

Temperature	-20 °C ~ +100 °C	
Pressure	≤ 0.5 Mpa	
Speed	≤ 5 m/sec	
Materials	Spring:	SUS304/SUS316
	Drive Ring:	SUS304/SUS316
	Retainer:	SUS304/SUS316
	Bellows:	NBR/EPDM/VITON
	Rotary Ring:	Carbon/SiC/TC
	Stationary Ring:	Ceramic/SiC/TC
	Cup Gasket:	NBR/EPDM/VITON

модель	D1	D3	D7	L1	L3	L4
ZY103-10	10	22.5	26	20.5	15.5	5
ZY103-12	12	22.5	26	20.5	15.5	5
ZY103-12T	12	22.5	26	22.5	15.5	7
ZY103-14	14	28	30	20.5	15.5	5
ZY103-16	16	30	35	20.5	15	5
ZY103-17	17	30	35	20.5	15.5	5
ZY103-18	18	30	35	20.5	15.5	5