




Mechanical seal

Used in centrifugal pumps, in-line pumps and general industrial pumps.

ZY-104

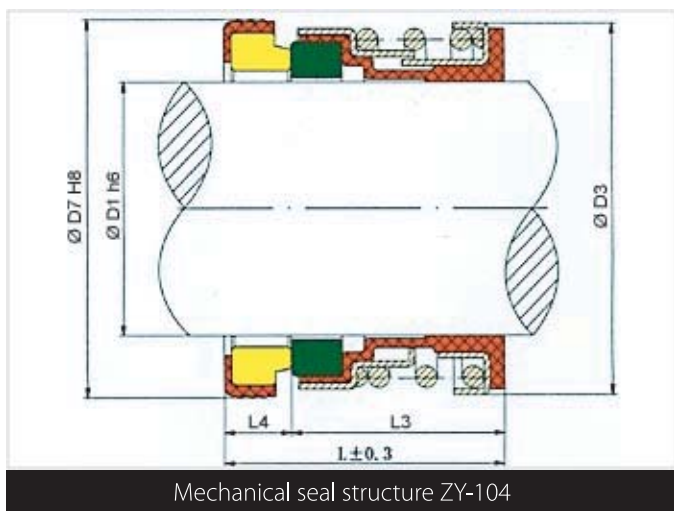

Mechanical seal structure ZY-104

Temperature	-20 °C ~ +100 °C	
Pressure	≤ 0.7 Mpa	
Speed	≤ 5 m/sec	
Materials	Stationary Ring:	Ceramic/SiC/TC
	Rotary Ring:	Carbon/SiC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other parts:	Copper/S.S/ SUS304/SUS316

модель	D1	D3	D7	L1	L3	L4
ZY104-9	9	20	22	20	14.5	5.5
ZY104-10	10	20	22	20	14.5	5.5
ZY104-12	12	22	24	20	14.5	5.5
ZY104-14	14	24	26	25	18	7
ZY104-15	15	26	28	25	18	7
ZY104-16	16	26	28	25	18	7
ZY104-17	17	31	34	25	18	7
ZY104-18	18	31	34	25	18	7
ZY104-19	19	33	36	25	18	7
ZY104-20	20	33	36	25	18	7
ZY104-22	22	36	38	25	18	7
ZY104-25	25	39	41	37	28	9
ZY104-30	30	43.5	46	37	28	9
ZY104-35	35	50.5	51	37	28	9
ZY104-40	40	56	60	40	29.5	10.5
ZY104-45	45	63.5	65	40	29.5	10.5