




Mechanical seal

Used in water pumps and agitator pumps.

ZY-108

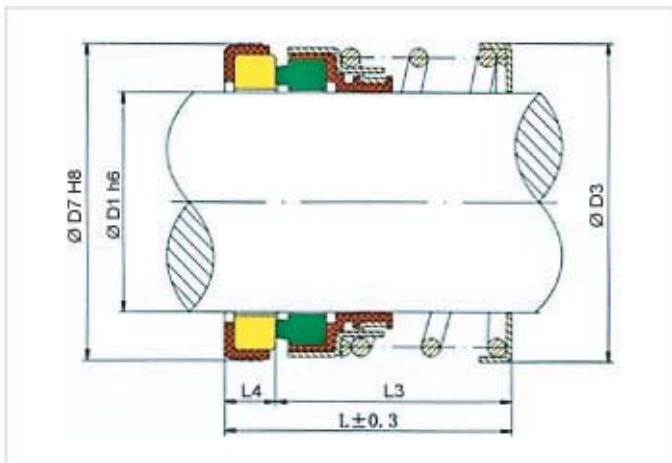

Mechanical seal structure ZY-108

| | | |
|-------------|-----------------------|----------------|
| Temperature | -20 °C ~ +100 °C | |
| Pressure | ≤ 0.5 Mpa | |
| Speed | ≤ 5 m/sec | |
| Materials | Stationary Ring: | Ceramic/SIC/TC |
| | Rotary Ring: | Carbon/SIC/TC |
| | Secondary Seal: | NBR/EPDM/VITON |
| | Spring & Other parts: | SUS304/SUS316 |

| модель | D1 | D3 | D7 | L1 | L3 | L4 |
|----------|----|------|----|----|------|-----|
| ZY108-9 | 9 | 20 | 21 | 20 | 15 | 5 |
| ZY108-10 | 10 | 20 | 21 | 20 | 15 | 5 |
| ZY108-11 | 11 | 22 | 23 | 20 | 15 | 5 |
| ZY108-12 | 12 | 22 | 23 | 20 | 20 | 5 |
| ZY108-14 | 14 | 24.5 | 25 | 25 | 20 | 5 |
| ZY108-15 | 15 | 26.5 | 27 | 25 | 20 | 5 |
| ZY108-16 | 16 | 26.5 | 27 | 25 | 20 | 5 |
| ZY108-17 | 17 | 32 | 33 | 25 | 20 | 5 |
| ZY108-18 | 18 | 32 | 33 | 25 | 20 | 5 |
| ZY108-19 | 19 | 34 | 35 | 25 | 20 | 5 |
| ZY108-20 | 20 | 34 | 35 | 25 | 20 | 5 |
| ZY108-22 | 22 | 37 | 37 | 28 | 22 | 6 |
| ZY108-25 | 25 | 39 | 40 | 32 | 24 | 8 |
| ZY108-28 | 28 | 42 | 43 | 35 | 27 | 8 |
| ZY108-30 | 30 | 45 | 45 | 35 | 27 | 8 |
| ZY108-35 | 35 | 50.5 | 50 | 37 | 29 | 8 |
| ZY108-40 | 40 | 57.5 | 58 | 40 | 31.5 | 8.5 |
| ZY108-45 | 45 | 62.5 | 63 | 40 | 31.5 | 8.5 |