




Mechanical seal

Used in clean water pumps, circulation pumps and general industrial pumps.

ZY-156

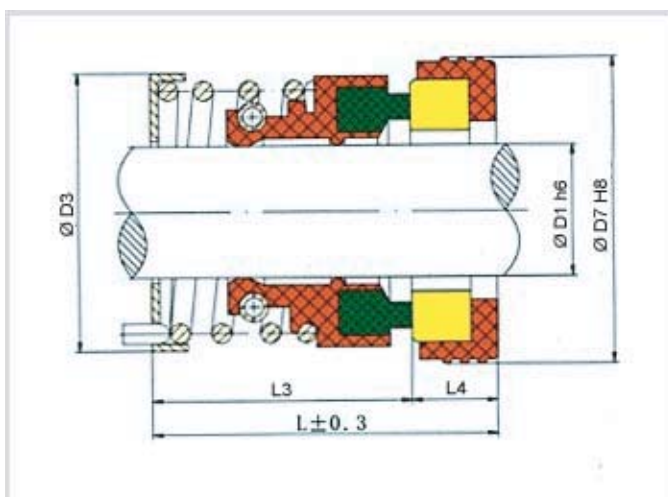

Mechanical seal structure ZY-156

Temperature	-20 °C ~ +100 °C	
Pressure	≤ 0.5 Mpa	
Speed	≤ 5 m/sec	
Materials	Stationary Ring:	Ceramic/SiC/TC
	Rotary Ring:	Carbon/SiC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other Parts:	SUS304/SUS316

модель	D1	D3	D7	L	L3	L4
ZY156-8	8	17	18	18	13.5	4.5
ZY156-8A	8	17	21	18	13	5
ZY156-9	9	18.5	21	22	16	6
ZY156-10	10	21	22	23	17	6
ZY156-11	11	21	24	23	16.5	6.5
ZY156-12	12	23	26	24	17.5	6.5
ZY156-13	13	23.5	26	24	17.5	6.5
ZY156-14	14	25	28	25	18.5	6.5
ZY156-15	15	25	28	25	18.5	6.5
ZY156-16	16	28.5	32	27	19	8
ZY156-17	17	28.5	32	27	19	8
ZY156-18	18	31.5	35	29	21	8
ZY156-19	19	31.5	35	29	21	8
ZY156-20	20	33.5	38	31	23	8
ZY156-22	22	34.5	40	32	24	8
ZY156-25	25	37.5	44	33	24	9
ZY156-28	28	40.5	46	34	25	9
ZY156-30	30	47.5	50	35	25.5	9.5
ZY156-32	32	47.5	54	37	27.5	9.5
ZY156-35	35	50.5	58	40	30	10
ZY156-38	38	53.5	60	42	32	10
ZY156-40	40	56.5	64	43	33	10
ZY156-45	45	61.5	66	45	35	10
ZY156-50	50	66.5	72	47	37	10