




## Mechanical seal

# ZY-166T

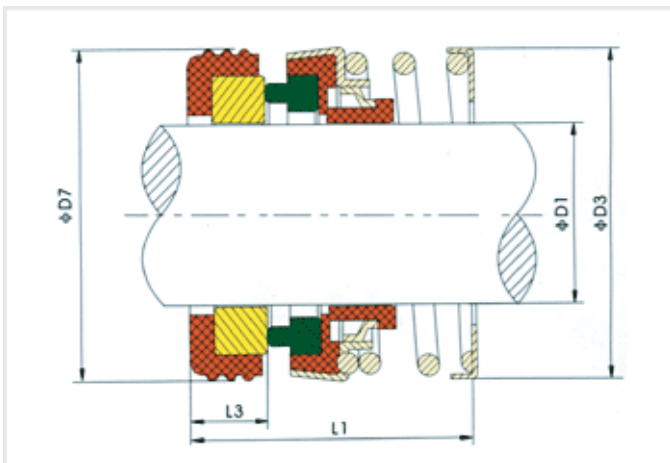

Mechanical seal structure ZY-166T

Temperature	-20 °C ~ +100 °C	
Pressure	≤ 0.5 Mpa	
Speed	≤ 5 m/sec	
Materials	Spring:	SUS304/SUS316
	Drive Ring:	SUS304/SUS316
	Retainer:	SUS304/SUS316
	Bellows:	NBR/EPDM/VITON
	Rotary Ring:	Carbon/SIC/TC
	Stationary Ring:	Ceramic/SIC/TC
	Cup Gasket:	NBR/EPDM/VITON

модель	D1	D3	D7	L1	L3
ZY166T-3/8"	9.525	23.292	24.587	34.138	8.738
ZY166T-1/2"	12.7	23.292	27.788	34.138	8.738
ZY166T-5/8"	15.875	30.099	30.937	35.712	10.312
ZY166T-3/4"	19.05	33.071	33.1/34.138	35.712	6.5/10.312
ZY166T-7/8"	22.225	36.297	37.287	35.712	10.312
ZY166T-1"	25.4	39.421	41.28/40.488	43.307	10.312
ZY166T-11/8"	28.575	44.45	47.625	44.907	11.913
ZY166T-11/4"	31.75	47.625	50.8	44.907	11.913
ZY166T-13/8"	34.925	50.8	53.975	44.907	11.913
ZY166T-11/2"	38.1	53.975	57.15	44.907	11.913
ZY166T-15/8"	41.275	60.325	60.325	44.907	11.913
ZY166T-13/4"	44.45	60.325	60.325	44.907	11.913
ZY166T-17/8"	47.625	63.881	66.675	52.934	11.913
ZY166T-2"	50.8	66.675	69.85	54.508	13.487