




Mechanical seal

Used in the submersible pumps and sewage pumps.

ZY-208

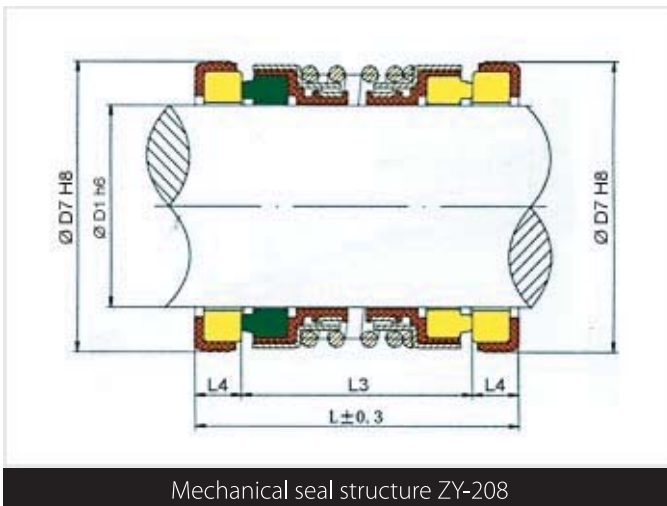

Mechanical seal structure ZY-208

Temperature	-20 °C ~ +100 °C	
Pressure	≤ 0.8 Mpa	
Speed	≤ 5 m/sec	
Materials	Stationary Ring:	Ceramic/SiC/TC
	Rotary Ring:	Carbon/SiC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other parts:	Copper/SUS304/ /SUS316

модель	D1	D7	L1	L3	L4
ZY208-10	10	21	30	20	5
ZY208-12	12	26	30	20	5
ZY208-14	14	28	38	28	5
ZY208-16	16	28	38	28	5
ZY208-18	18	33	38	28	5
ZY208-20	20	35	40	30	5
ZY208-25	25	40	48	32	8
ZY208-30	30	45	51	35	8
ZY208-35	35	50	51	35	8