




## Mechanical seal

Used in clean water pumps and circulation pumps.

# ZY-301

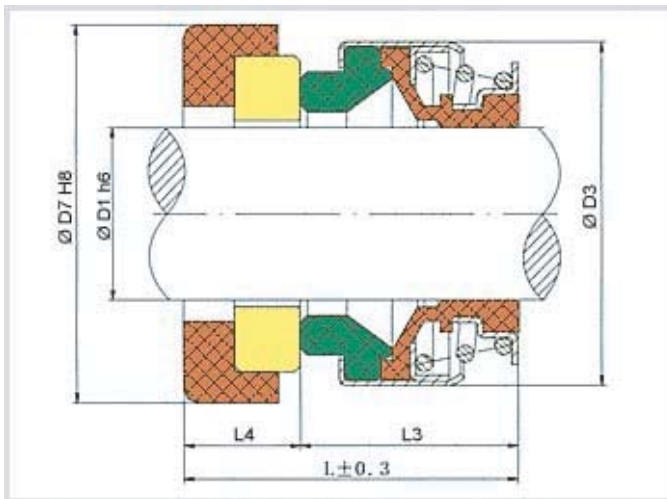

Mechanical seal structure ZY-301

Temperature	-20 °C ~ +100 °C	
Pressure	≤0.5 Mpa	
Speed	≤10 m/sec	
Materials	Stationary Ring:	Ceramic/SiC/TC
	Rotary Ring:	Carbon/SiC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other Parts:	Copper/S.S./SUS304 /SUS316

модель	D1	D3	D7	L	L3	L4	модель	D1	D3	D7	L	L3	L4
ZY301-6	6	18	22	15	11	4	ZY301-22P	22	39	42	21	13	8
ZY301-8	8	18	22	15	11	4	ZY301-22	22	42	45	23	13	10
ZY301-8L	8	24	26	19	11	8	ZY301-23	23	47	50	23.5	13.5	10
ZY301-10	10	24	26	19	11	8	ZY301-24	24	47	50	23.5	13.5	10
ZY301-11	11	24	26	21	13	8	ZY301-25	25	47	50	23.5	13.5	10
ZY301-12	12	24	26	21	13	8	ZY301-25P	25	42	45	23	13	10
ZY301-13	13	24	26	18.5	13	5.5	ZY301-26	26	47	50	23.5	13.5	10
ZY301-14P	14	27.5	28.5	21	13	8	ZY301-27	27	47	50	23.5	13.5	10
ZY301-14	14	32	29.5	21	13	8	ZY301-28	28	54	57	25	15	10
ZY301-15P	15	27.5	30	21	13	8	ZY301-30	30	54	57	25	15	10
ZY301-15	15	32	29.5	21	13	8	ZY301-32	32	54	57	25	15	10
ZY301-16P	16	27.5	30	21	13	8	ZY301-35	35	60	63	26	16	10
ZY301-16	16	32	29.5	21	13	8	ZY301-38	38	65	68	30	18	12
ZY301-16L	16	39	42	21	13	8	ZY301-40	40	65	68	30	18	12
ZY301-17	17	39	42	21	13	8	ZY301-45	45	70	73	32	20	12
ZY301-18	18	39	42	21	13	8	ZY301-50	50	85	88	38	23	15
ZY301-19	19	39	42	21	13	8	ZY301-55	55	85	88	38	23	15
ZY301-20P	20	35	38	21	13	8	ZY301-60	60	105	110	45	30	15
ZY301-20	20	39	42	21	13	8	ZY301-65	65	105	110	45	30	15
ZY301-20L	20	42	45	23	13	10	ZY301-70	70	105	110	47	32	15