




## Mechanical seal

Used in auto-cooling pumps, compressors, mixers and other rotating equipments.

# ZY-560D

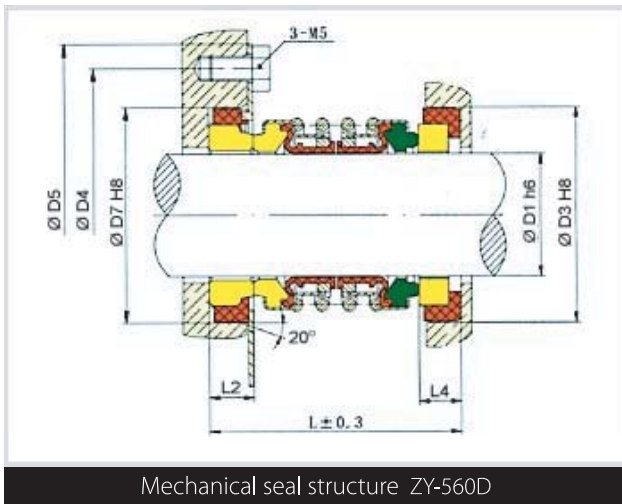

Mechanical seal structure ZY-560D

Temperature	-40 °C ~ +150 °C	
Pressure	≤2.8 Mpa	
Speed	≤13 m/sec	
Medium	Oil, water and general corrosive liquid	
Materials	Stationary Ring:	Ceramic/SiC/TC
	Rotary Ring:	Carbon/SiC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other Parts:	SUS304/SUS316

модель	D1	D3	D7	L1	L2	L3
ZY560D-13	13	25	25	36	5	5
ZY560D-14	14	30	30	36	5	5
ZY560D-15	15	30	30	36	5	5
ZY560D-16	16	30	30	36	5	5
ZY560D-19	19	35	38	49	7	10
ZY560D-20	20	38	44	49	7	7
ZY560D-25	25	44	50	51	7	7
ZY560D-30	30	50	57	59	9	8
ZY560D-35	35	38	64	61	9	9
ZY560D-40	40	64	70	64	11	9
ZY560D-45	45	66	70	65	10	9
ZY560D-50	50	72	80	69	10	9