




# Mechanical seal

# ZY-580

Used in different pumps, mixers and other rotating equipments which apply to oil....

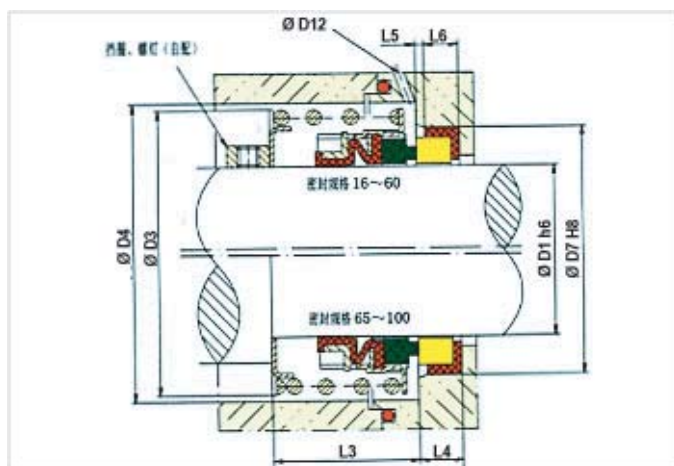

Mechanical seal structure ZY-580

Temperature	-40 °C ~ +150 °C	
Pressure	≤ 1.4 Mpa	
Speed	≤ 13 m/sec	
Materials	Stationary Ring:	Ceramic/SIC/TC
	Rotary Ring:	Carbon/SIC/TC
	Secondary Seal:	NBR/EPDM/VITON
	Spring & Other parts:	SUS304/SUS316
	Used in different pumps, mixers and other rotating equipments which apply to oil, water and other weak corrosive solutions.	

модель	D1	D3	D4	D7	D12	L	L3	L4	L5	L6
ZY580-3/8"	9.52	28	32	24.6	5	33.7	25	8.7	1.5	6
ZY580-1/2"	12.7	32	35	27.8	5	33.7	25	8.7	1.5	6
ZY580-5/8"	15.87	34	39	30.95	5	35.3	25	10.3	1.5	6
ZY580-3/4"	19.05	38.8	43	34.15	5	35.3	25	10.3	2	7
ZY580-7/8"	22.22	41.5	46	37.3	5	35.3	25	10.3	2	7
ZY580-1"	25.4	44.8	50	40.5	5	35.3	25	10.3	2	7
ZY580-11/8"	28.57	48.5	59	47.65	5	44.9	33	11.9	2	7
ZY580-11/4"	31.75	57	62	50.8	5	44.9	33	11.9	2	7
ZY580-13/8"	34.92	57	66	54	5	44.9	33	11.9	2	7
ZY580-11/2"	38.1	67	70	57.15	5	44.9	33	11.9	2	7
ZY580-15/8"	41.27	67	74	60.35	5	44.9	33	11.9	2	7
ZY580-13/4"	44.45	73	77	63.5	5	52.9	41	11.9	2	7
ZY580-17/8"	47.62	73	81	66.7	5	52.9	41	11.9	2	10
ZY580-2"	50.8	79	85	69.85	8	54.5	41	13.5	2.5	10
ZY580-21/8"	53.97	84	88	73.05	8	54.5	41	13.5	2.5	10
ZY580-21/4"	57.15	84	91	76.2	8	54.5	41	13.5	2.5	10
ZY580-23/8"	60.32	90	94	79.4	8	54.5	41	13.5	2.5	10
ZY580-21/2"	63.5	94	97	82.55	8	54.5	41	13.5	2.5	10