




Mechanical seal

ZY-58U

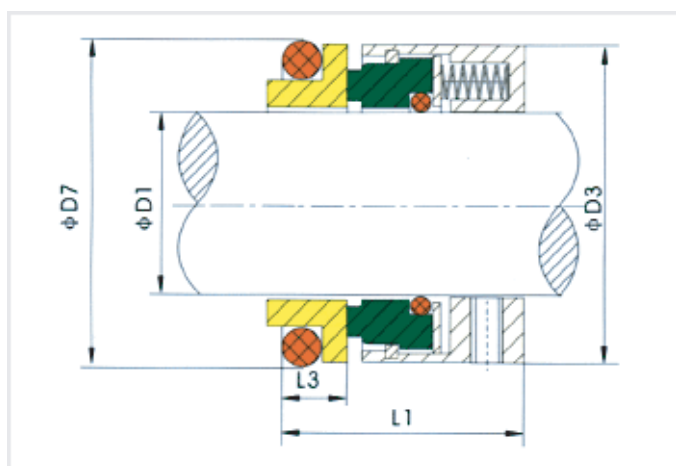

Mechanical seal structure ZY-58U

| | | |
|-------------|------------------|----------------|
| Temperature | -30 °C ~ +200 °C | |
| Pressure | ≤ 2.8 Mpa | |
| Speed | ≤ 13 m/sec | |
| Materials | Spring: | SUS304/SUS316 |
| | Halted Ring: | SUS304/SUS316 |
| | Push Ring: | SUS304/SUS316 |
| | Retainer: | SUS304/SUS316 |
| | O-Ring: | NBR/EPDM/VITON |
| | Rotary Ring: | Carbon/SIC/TC |
| | Stationary Ring: | Ceramic/SIC/TC |

| модель | D1 | D3 | D7 | L1 | L3 |
|----------|----|----|----|------|------|
| ZY58U-14 | 14 | 24 | 25 | 35 | 12 |
| ZY58U-16 | 16 | 26 | 27 | 35 | 12 |
| ZY58U-18 | 18 | 32 | 33 | 37.5 | 13.5 |
| ZY58U-20 | 20 | 34 | 35 | 37.5 | 13.5 |
| ZY58U-22 | 22 | 36 | 37 | 37.5 | 13.5 |
| ZY58U-24 | 24 | 38 | 39 | 40 | 13.3 |
| ZY58U-25 | 25 | 39 | 40 | 40 | 13 |
| ZY58U-28 | 28 | 42 | 43 | 42.5 | 12.5 |
| ZY58U-30 | 30 | 44 | 45 | 42.5 | 12 |
| ZY58U-32 | 32 | 46 | 48 | 42.5 | 12 |
| ZY58U-35 | 35 | 49 | 50 | 42.5 | 12 |
| ZY58U-38 | 38 | 54 | 56 | 45 | 13 |
| ZY58U-40 | 40 | 56 | 58 | 45 | 13 |
| ZY58U-45 | 45 | 61 | 63 | 45 | 13 |
| ZY58U-50 | 50 | 66 | 70 | 47.5 | 13.5 |
| ZY58U-55 | 55 | 71 | 75 | 47.5 | 13.5 |
| ZY58U-60 | 60 | 80 | 80 | 52.5 | 13.5 |
| ZY58U-65 | 65 | 85 | 85 | 52.5 | 13.5 |
| ZY58U-70 | 70 | 90 | 92 | 60 | 14.5 |