



BSMG1



Parameter
 Temperature: $-30^{\circ}\text{C} \sim 200^{\circ}\text{C}$
 Pressure: $\leq 1.20\text{Mpa}$
 Linear Velocity: $\leq 12\text{m/S}$
 Pumps: Centrifugal pumps, blender,
 general and light chemical fields

Materials
 Rotary Ring: Carbon/SiC/TC
 Stationary Ring: Ceramic/SiC/TC/Carbon
 Secondary Seals: NBR/EPDM/VITON
 Spring & Other Parts: SS304/SS316
 Seat: G4, G9, G6, G50, G60, G606

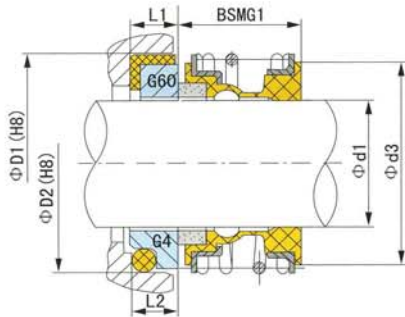

BSMG1	d1	d3	D1	D2	D3	L1	L2	L3	L4
14.7	10	22	21	19.2	24.6	6.5	6.5	9	10
15.2	12	24.5	23	21.6	27.8	6.5	5.5	9	10
17.2	14	28	25	24.6	30.95	6.5	5.5	10.5	10
17.2	15	28	27	24.6	30.95	6.5	6.5	10.5	10
17.2	16	28	27	28	30.95	6.5	7.5	10.5	10
19.7	18	31.5	33	30	34.15	7.5	8	10.5	11.4
21.7	19	36.5	35	35	34.15	7.5	7.5	10.5	11.4
21.7	20	36.5	35	35	35.7	7.5	7.5	10.5	11.4
21.7	22	36.5	37	35	37.3	7.5	7.5	10.5	11.4
22.7	24	42	39	38	40.5	7.5	7.5	10.5	11.4
23.2	25	42	40	38	40.5	7.5	7.5	10.5	11.4
26.7	28	48.5	43	42	46.65	7.5	9	12	11.4
26.7	30	48.5	45	45	50.8	7.5	10.5	12	11.4
27.7	32	53	48	48	50.8	7.5	10.5	12	11.4
27.7	33	53	48	50	54	7.5	11	12	11.4
28.7	35	56.5	50	52	54	7.5	11	12	11.4
30.2	38	58.5	56	55	57.15	9	10.5	12	14
30.2	40	61.5	58	58	60.35	9	10.8	12	14
30.2	42	65	61	62	63.5	9	12	12	14
30.2	43	65	61	62	63.5	9	12	12	14
30.2	45	67.5	63	64	63.5	9	11.5	12	14
30.7	48	70	66	68.4	66.7	9	11.5	12	14
30.7	50	73.5	70	69.3	69.85	9.5	11.5	13.5	15
33.2	53	78	73	72.3	73.05	11	12.5	13.5	15
35.2	55	80.5	75	75.4	76.2	11	13.5	13.5	15
37.2	58	85	78	78.4	79.4	11	13.5	13.5	15
38.2	60	88	80	80.4	79.4	11	13.5	13.5	15
40.2	65	93	85	85.4	92.1	11	13	16	15
40.2	68	96	90	91.5	95.25	11.5	13.7	16	18
40.2	70	99	92	92	95.25	11.5	13	16	18
40.2	75	106.5	97	99	101.6	11.5	14	16	18
40.2	80	111.5	105	104	114.3	12	15	20	18.3
41.2	85	119.5	110	109	117.5	14	15	20	18.3
45.2	90	126.5	115	114	123.85	14	15	20	18.3
46.2	95	131.5	120	120.3	127	14	16	20	17.3
47.2	100	136.5	125	123.3	133.35	14	16	20	17.3