


**ZY-H**



Рабочие условия	
Температура	-20°C~180°C
Давление	≤2.5Mpa
Скорость	≤20m/sec
Материалы	
Spring	SUS304/SUS316
Drive Ring	SUS304/SUS316
Retainer	SUS304/SUS316
Bellows	NBR/EPDM/ITON
Rotary Ring	Carbon/SiC/TC
Stationary Ring	Ceramic/SiC/TC
Cup Gasket	NBR/EPDM/ITON

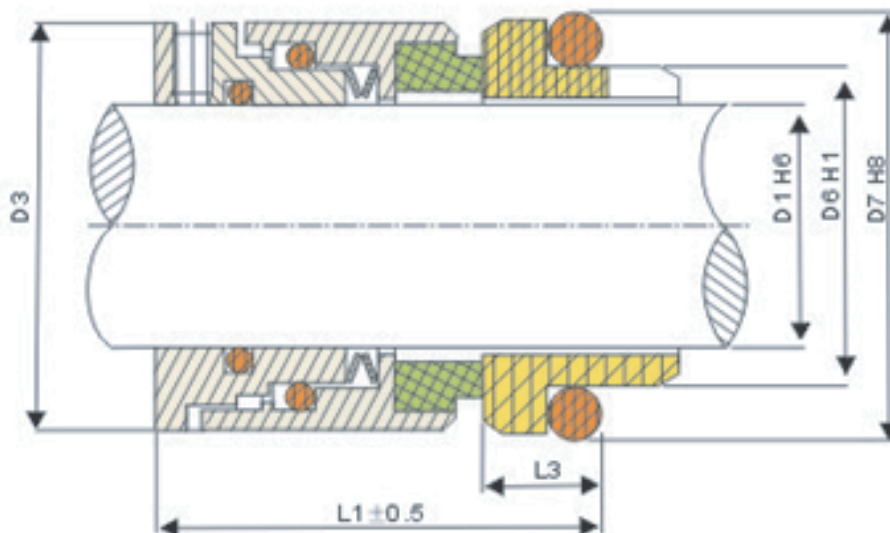

ZY-H

ZY-H						
MODEL	D1	D3	D7	L1	L3	f
ZYH-18	18	32	27	33	7	37.5
ZYH-20	20	34	29	35	7	37.5
ZYH-24	22	36	31	37	7	37.5
ZYH-20	18	32	27	33	7	37.5
ZYH-22	22	37	37	37.5	11.5	7
ZYH-24	24	39	39	40	11.5	8
ZYH-25	25	40	40	40	11.5	8
ZYH-28	28	43	43	42.5	11.5	8
ZYH-30	30	45	45	42.5	11.5	8
ZYH-32	32	47	48	42.5	11.5	8
ZYH-33	33	48	48	42.5	11.5	8
ZYH-35	35	50	50	42.5	11.5	8
ZYH-38	38	55	56	45	14	8
ZYH-40	40	57	58	45	14	8
ZYH-43	43	60	61	45	14	8
ZYH-45	45	62	63	45	14	8
ZYH-48	48	65	66	45	14	8
ZYH-50	50	67	70	47.5	15	8
ZYH-53	53	70	73	47.5	15	8
ZYH-55	55	72	75	47.5	15	8
ZYH-58	58	79	78	52.5	15	9
ZYH-60	60	81	80	52.5	15	9
ZYH-63	63	84	83	52.5	15	9
ZYH-65	65	86	85	52.5	15	9
ZYH-68	68	89	90	52.5	18	9
ZYH-70	70	91	92	60	18	9
ZYH-75	75	99	97	60	18	10
ZYH-80	80	104	105	60	18.2	10
ZYH-85	85	109	110	60	18.2	10
ZYH-90	90	114	115	65	18.2	10
ZYH-95	95	119	120	65	19.2	10
ZYH-100	100	124	125	65	19.2	10