

BSM7N



Parameter

Temperature: $-30^{\circ}\text{C} \sim 220^{\circ}\text{C}$

Pressure: $\leq 1.20\text{Mpa}$

Linear Velocity: $\leq 18\text{m/S}$

Medium: water, oil, acids, alkali, ect.



Materials

Rotary Ring: Carbon/SiC/TC/SUS

Stationary Ring: Carbon/SiC/TC

Secondary Seals: NBR/EPDM/VITON

Spring & Other Parts: SS304/SS316

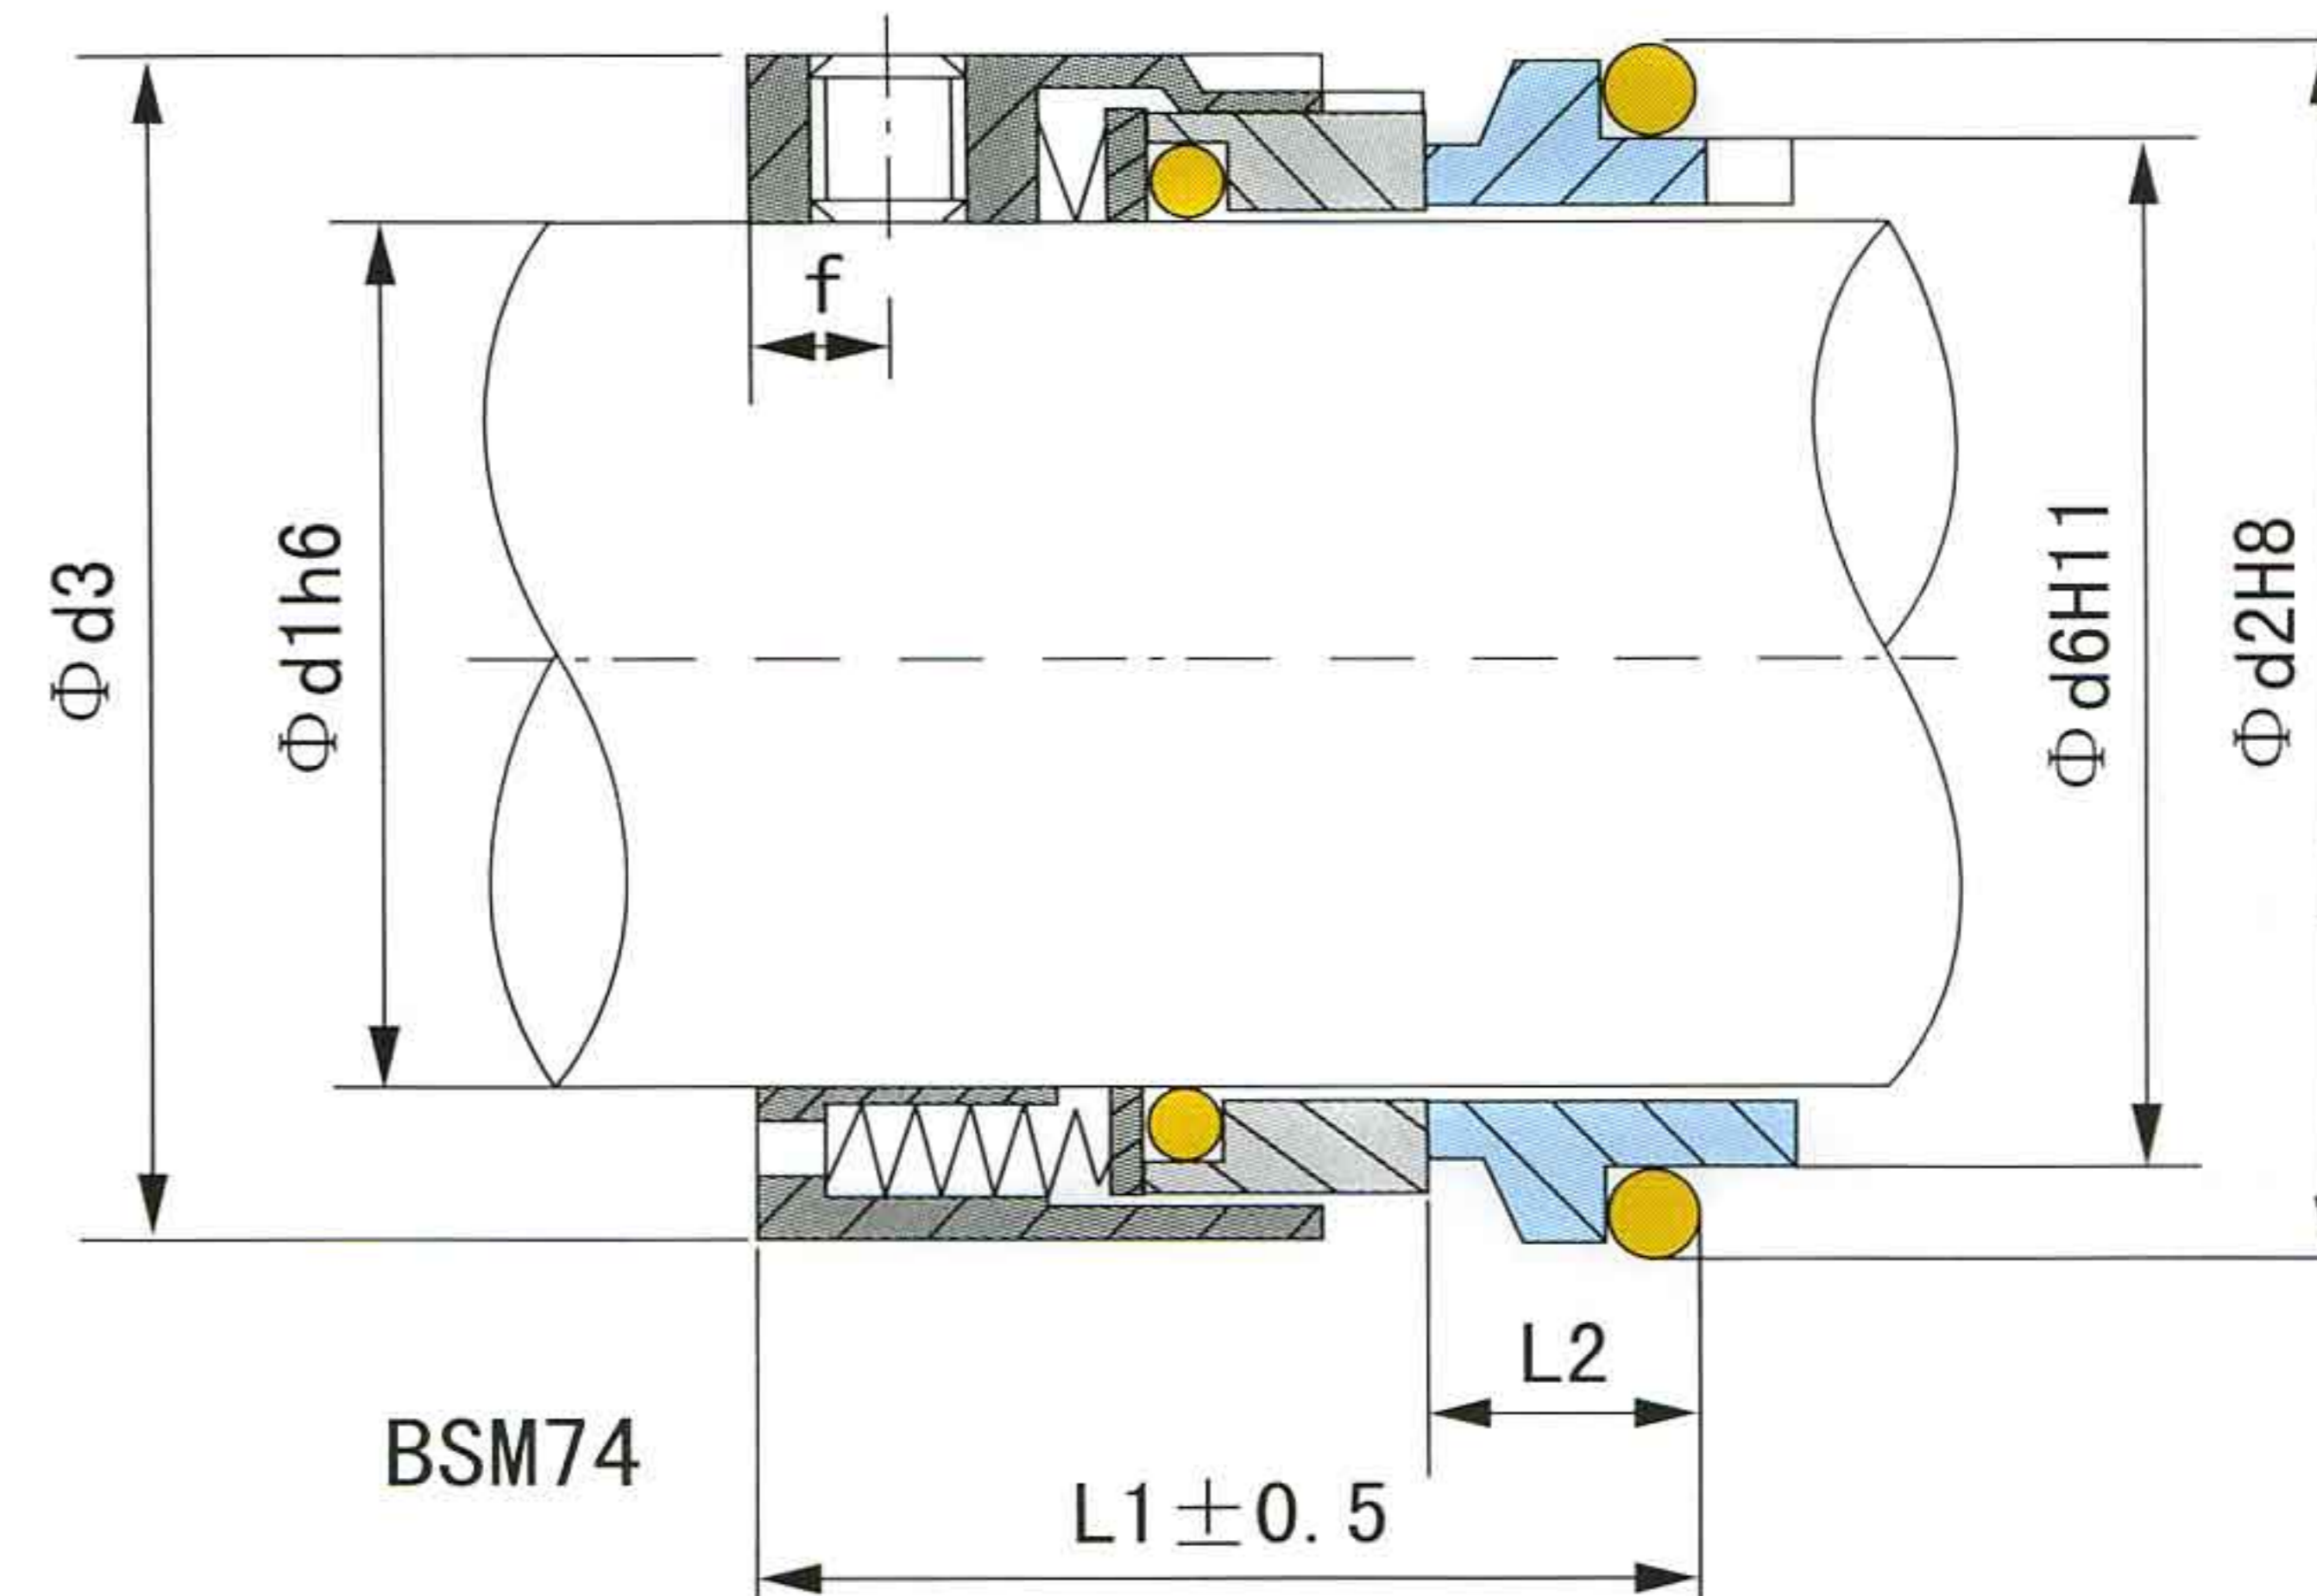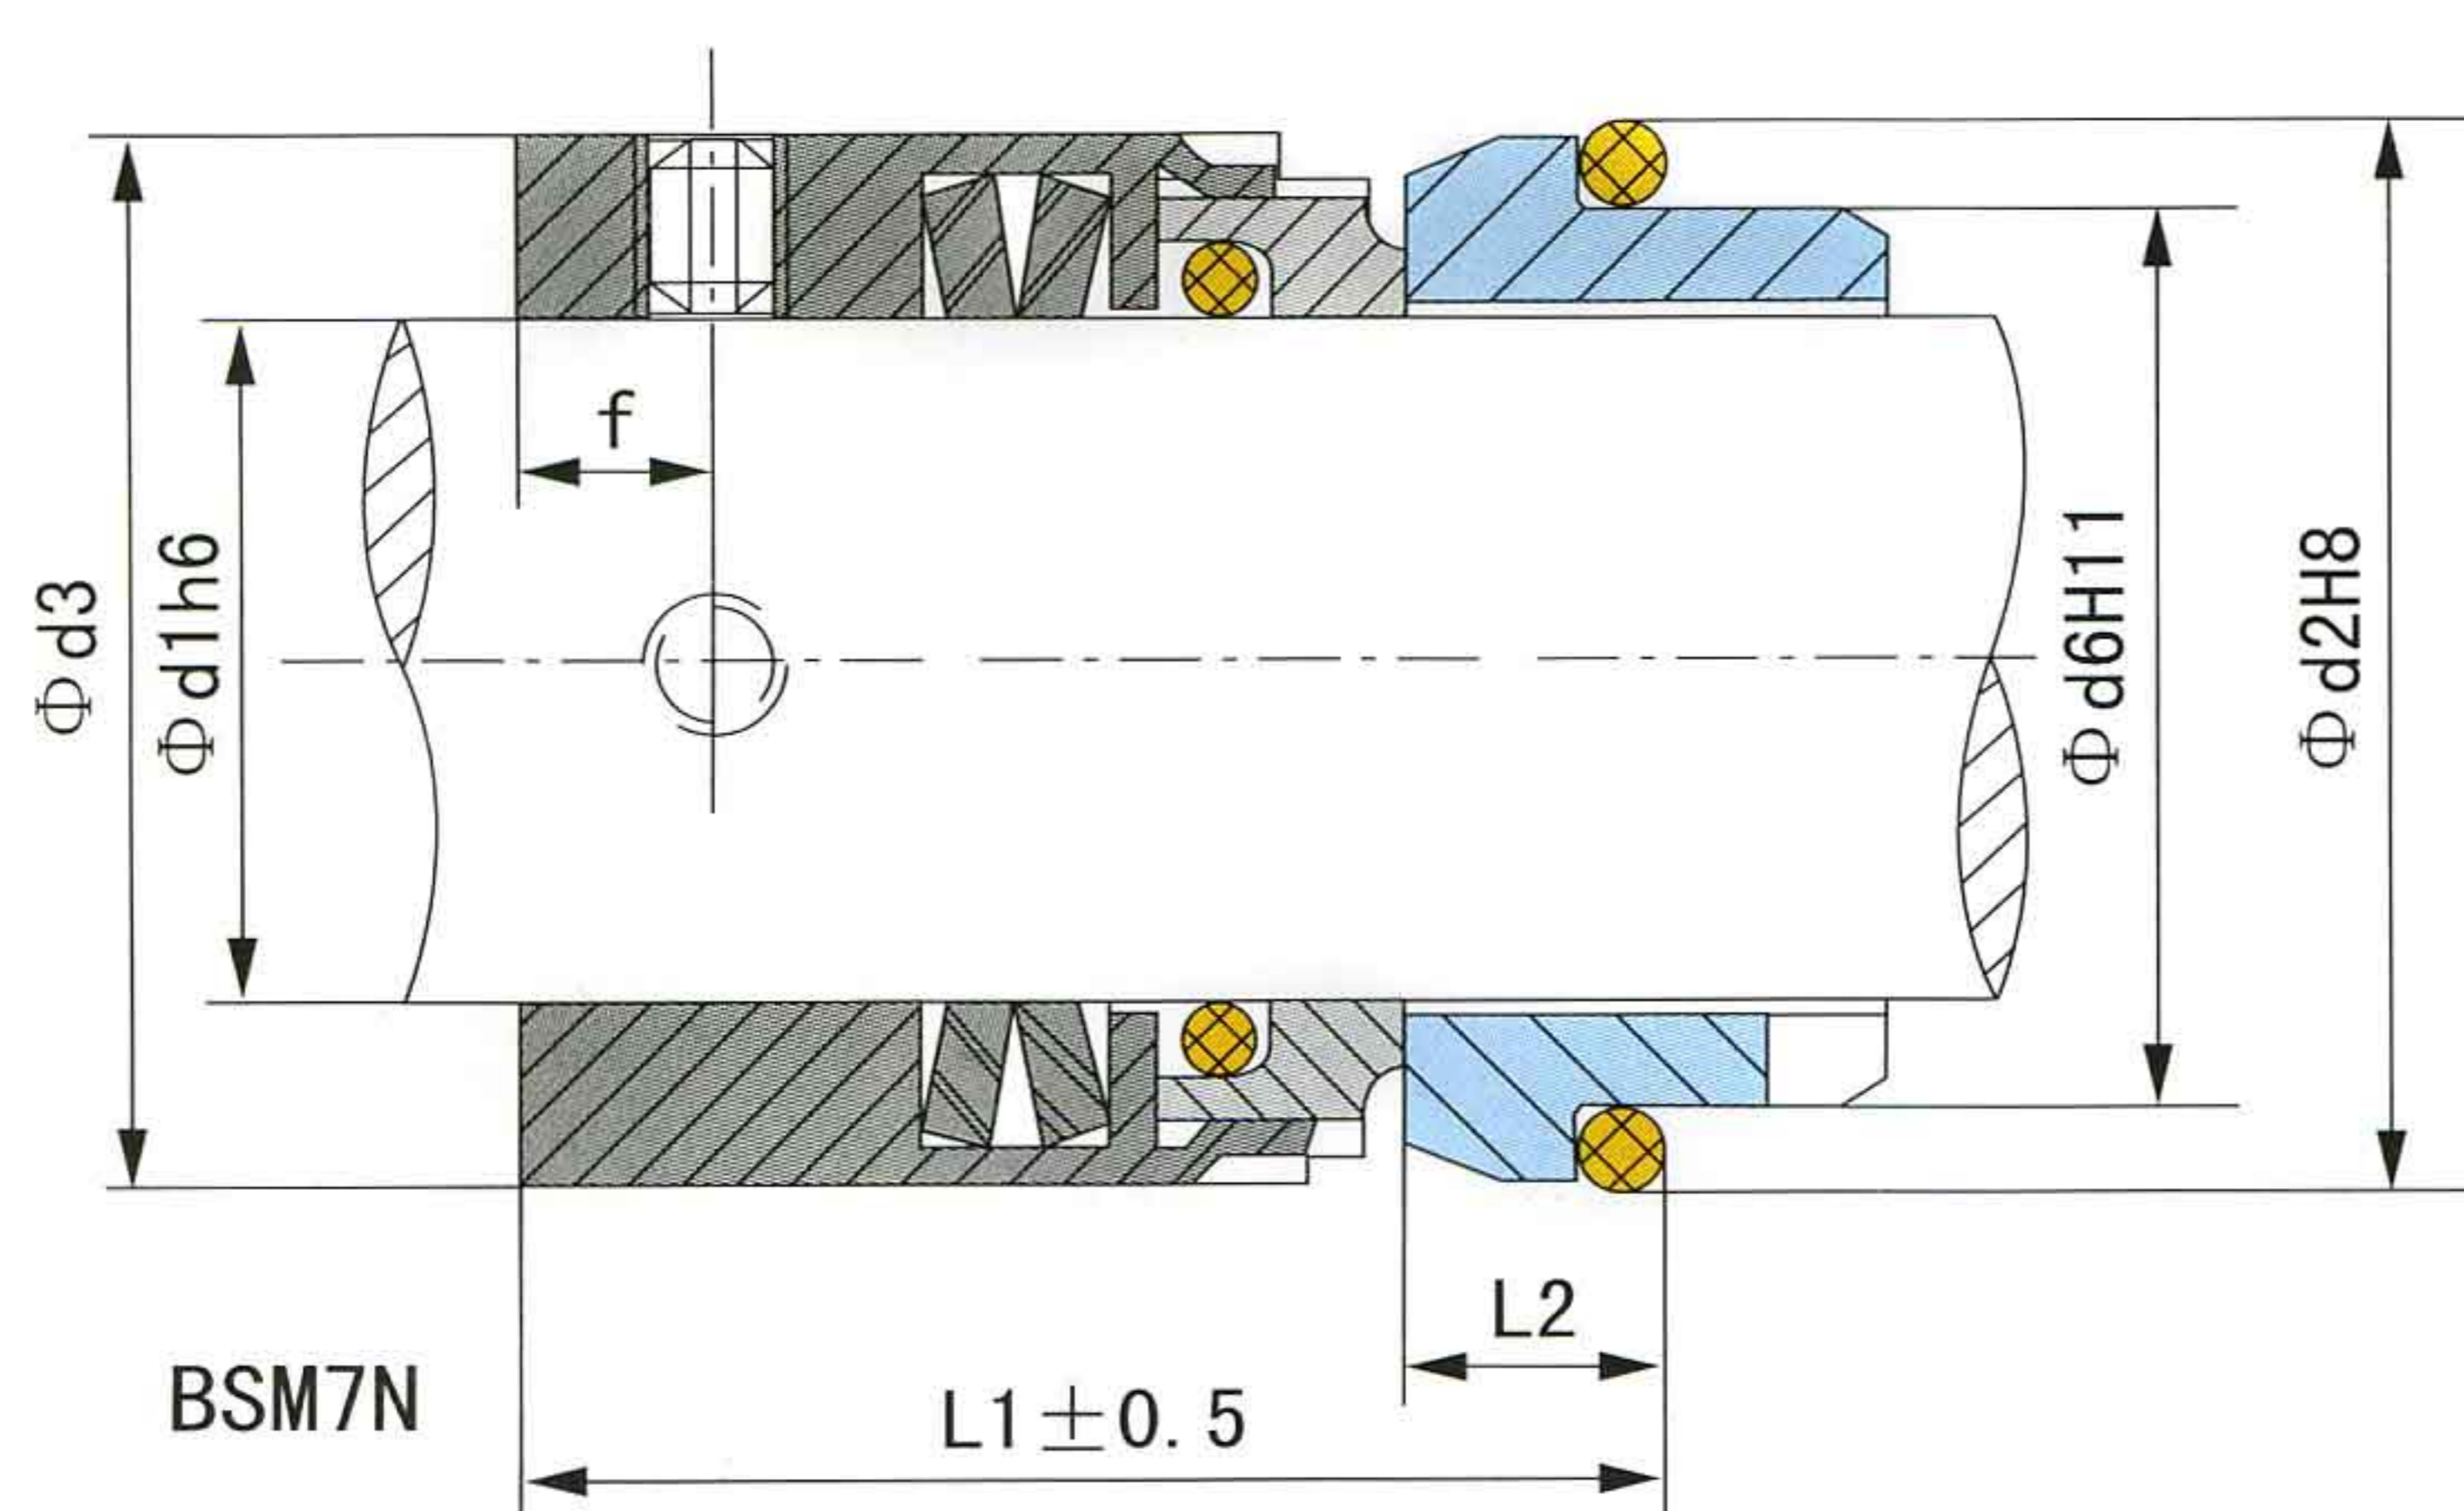

Model	d1	d3	d6	d2	L1	L2	f
BSM7N-14	14	25	21	25	35	10	6
BSM7N-16	16	27	23	27	35	10	6
BSM7N-18	18	33	27	33	37.5	11.5	7
BSM7N-20	20	35	29	35	37.5	11.5	7
BSM7N-22	22	37	31	37	37.5	11.5	7
BSM7N-24	24	39	33	39	40	11.5	8
BSM7N-25	25	40	34	40	40	11.5	8
BSM7N-28	28	43	37	43	42.5	11.5	8
BSM7N-30	30	45	39	45	42.5	11.5	8
BSM7N-32	32	47	42	48	42.5	11.5	8
BSM7N-33	33	48	42	48	42.5	11.5	8
BSM7N-35	35	50	44	50	42.5	11.5	8
BSM7N-38	38	55	49	56	45	14	8
BSM7N-40	40	57	51	58	45	14	8
BSM7N-43	43	60	54	61	45	14	8
BSM7N-45	45	62	56	63	45	14	8
BSM7N-48	48	65	59	66	45	14	8
BSM7N-50	50	67	62	70	47.5	15	8
BSM7N-53	53	70	65	73	47.5	15	8
BSM7N-55	55	72	67	75	47.5	15	8
BSM7N-58	58	79	70	78	52.5	15	9
BSM7N-60	60	81	72	80	52.5	15	9
BSM7N-63	63	84	75	83	52.5	15	9
BSM7N-65	65	86	77	85	52.5	15	9
BSM7N-68	68	89	81	90	52.5	18	9
BSM7N-70	70	91	83	92	60	18	9
BSM7N-75	75	99	88	97	60	18	10
BSM7N-80	80	104	95	105	60	18.2	10
BSM7N-85	85	109	100	110	60	18.2	10
BSM7N-90	90	114	105	115	65	18.2	10
BSM7N-95	95	119	110	120	65	17.2	10
BSM7N-100	100	124	115	125	65	17.2	10